


EAF-4M Series

4-Inch Thickness



Electrical System Wiring Diagram

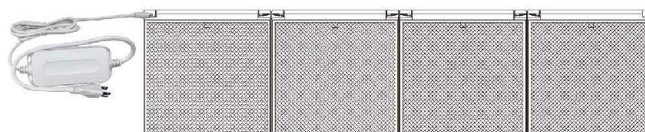

DC12V
Power Adapter

Parameters

Model	Dimension W×H×T (mm)	Air Volume / Pressure Drop (m³/h & Pa)			Efficiency ASHRAE52.2-2017	Power Adapter Power Supply	Status Indication	Rated Power(w)	Weight (kg)
EAF24244M-E	592x592x95	2550/45	3400/65	4250/100	MERV 16	100-240V 50/60Hz DC12-24V	Running	≤12	6.7
EAF12244M-E	287x592x95	1250/45	1700/65	2100/100	MERV 16	100-240V 50/60Hz DC12-24V	Running	≤12	3.3
EAF20244M-E	490x592x95	2100/45	2800/65	3500/100	MERV 16	100-240V 50/60Hz DC12-24V	Running	≤12	5.6
EAF20204M-E	490x490x95	1750/45	2350/65	2950/100	MERV 16	100-240V 50/60Hz DC12-24V	Running	≤12	4.6
EAF16204M-E	390x490x95	1400/45	1850/65	2350/100	MERV 16	100-240V 50/60Hz DC12-24V	Running	≤12	3.7
EAF20254M-E	490x618x95	2200/45	2870/65	3650/100	MERV 16	100-240V 50/60Hz DC12-24V	Running	≤12	5.8
EAF25254M-E	618x618x95	2750/45	3650/65	4600/100	MERV 16	100-240V 50/60Hz DC12-24V	Running	≤12	7.3

Name	Voltage Range	Frequency (Hz)	Max Connecting PC.
DC 12V Power Adapter	100-240V	50/60	4 Units

Performance Curve

