


EAF-4MA Panel Type series

Replacement for Panel Media Filters



Electrical System Wiring Diagram

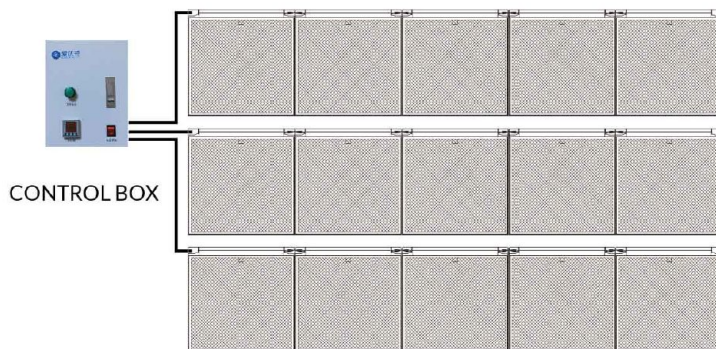

Parameters

Model	Dimension W×H×T (mm)	Air Volume (m³/h)	Air Velocity / Pressure Drop (m/s & Pa)			Efficiency ASHRAE52.2-2017	Power Adapter Power Supply	Status Indication	Rated Power(w)	Weight (kg)
EAF24244MA-E	592x592x95	3400	1.5/21	1.9/30	2.5/45	MERV 16	100-240V 50/60Hz DC12-24V	Running	≤12	6.7
EAF12244MA-E	287x592x95	1700	1.5/21	1.9/30	2.5/45	MERV 16	100-240V 50/60Hz DC12-24V	Running	≤12	3.3
EAF20244MA-E	490x592x95	2800	1.5/21	1.9/30	2.5/45	MERV 16	100-240V 50/60Hz DC12-24V	Running	≤12	5.6
EAF20204MA-E	490x490x95	2350	1.5/21	1.9/30	2.5/45	MERV 16	100-240V 50/60Hz DC12-24V	Running	≤12	4.6
EAF16204MA-E	390x490x95	1850	1.5/21	1.9/30	2.5/45	MERV 16	100-240V 50/60Hz DC12-24V	Running	≤12	3.7
EAF20254MA-E	490x618x95	2950	1.5/21	1.9/30	2.5/45	MERV 16	100-240V 50/60Hz DC12-24V	Running	≤12	5.8
EAF25254MA-E	618x618x95	3650	1.5/21	1.9/30	2.5/45	MERV 16	100-240V 50/60Hz DC12-24V	Running	≤12	7.3

Name	Model	Weight (kg)	Max Connecting PC.
CONTROL BOX	EAF-BOX	6	Unlimited

Performance Curve

