


EAF-5MB Bag Type series

Replacement for Bag Media Filters



Electrical System Wiring Diagram

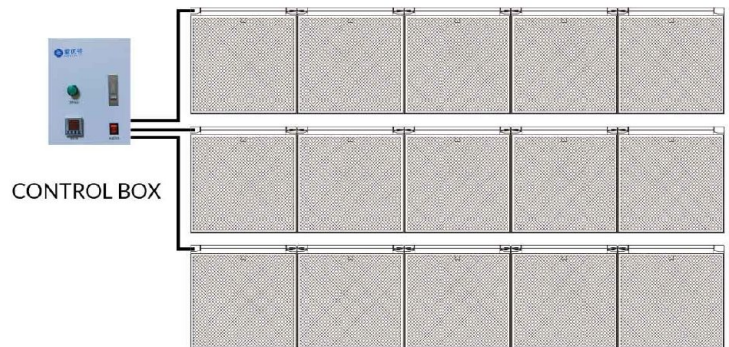

Parameters

Model	Dimension W×H×T (mm)	Air Volume (m ³ /h)	Air Velocity / Pressure Drop (m/s & Pa)			Efficiency ASHRAE52.2-2017	Power Adapter Power Supply	Status Indication	Rated Power(w)	Weight (kg)
EAF24245MB-E	592x592x125	3400	1.5/27	1.9/38	2.5/55	MERV 16	100-240V 50/60Hz DC12-24V	Running	≤12	7.4
EAF12245MB-E	287x592x125	1700	1.5/27	1.9/38	2.5/55	MERV 16	100-240V 50/60Hz DC12-24V	Running	≤12	3.6
EAF20245MB-E	490x592x125	2800	1.5/27	1.9/38	2.5/55	MERV 16	100-240V 50/60Hz DC12-24V	Running	≤12	6.1
EAF20205MB-E	490x490x125	2350	1.5/27	1.9/38	2.5/55	MERV 16	100-240V 50/60Hz DC12-24V	Running	≤12	5.1
EAF16205MB-E	390x490x125	1850	1.5/27	1.9/38	2.5/55	MERV 16	100-240V 50/60Hz DC12-24V	Running	≤12	4.1
EAF20255MB-E	490x618x125	2950	1.5/27	1.9/38	2.5/55	MERV 16	100-240V 50/60Hz DC12-24V	Running	≤12	6.4
EAF25255MB-E	618x618x125	3650	1.5/27	1.9/38	2.5/55	MERV 16	100-240V 50/60Hz DC12-24V	Running	≤12	8.0

Name	Model	Weight (kg)	Max Connecting PC.
CONTROL BOX	EAF-BOX	6	Unlimited

Performance Curve

